

FullFlow



Dimensions & Weight

Overall length	248 mm, ¹ (or 9¾")
Overall diameter	Ø73 mm
Dry weight	240 grs.



1. To be used with standard 10" pressure housing

Performance

Initial flow rate	20L/min. @ 2Bar ¹
Capacity	10,000L or 6 months ¹
Bacteria retention	> 99.9999 % (log 6) ²

1. Flow rates and capacity depend on the quality of the feed water.

2. Tested by KIWA water research using Pseudomonas Diminuta

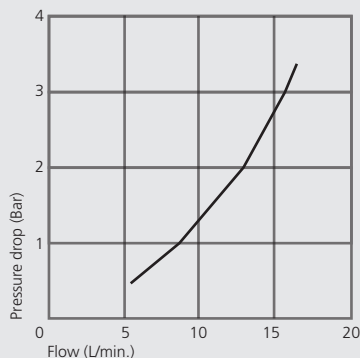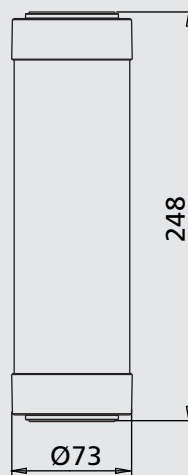

Norit | Filtrix FullFlow Water filter

Materials

Plastic parts	ABS, KTW approved
O-rings and gaskets	NBR, KTW approved
Potting material	Epoxy, DVGW approved
Membranes	Blend of PES and PVP, DVGW approved

Membrane specifications

Maximum pore size	0.2 µm
Mean pore size	0.14 µm
Area	0.3 m ²

Operating conditions

Maximum operating pressure	4 Bar
Minimum operating temperature	>0° C
Maximum operating temperature	50° C
Minimum storage temperature	-10° C
Maximum storage temperature	60° C

Storage and Handling

During storage the product should be dry.
After first use the product should be protected against freezing.
Products need to be handled with care and should not be exposed to shocks, drops etc.

Disclaimer: The information and data contained in this document are based on our general experience and are believed to be correct. They are given in good faith and are intended to provide a guideline for the selection and use of our products. Since the conditions under which our products may be used are beyond our control, this information does not imply any guarantee of final product performance and we cannot accept any liability with respect to the use of our products. The quality of our products is guaranteed under our conditions of sale. Existing industrial property rights must be observed.

Filtrix BV Siliciumweg 28 • 3812 SX Amersfoort • The Netherlands • T +31 (0)33 422 04 40 • F +31 (0)33 422 04 41 • E info@filtrix.com www.filtrix.com

Product datasheet: FullFlow

Norit

leading in purification

Filtrix