

Dimensions & Weight

Overall length	240 mm
Overall diameter	Ø88 mm
Dry weight system	500 grams

Connection

To mains	3/8" BSP
----------	----------

Storage & Handling

- Keep dry during storage
- Protect against freezing after first use
- Handle with care; do not expose to shocks
- Disposable product; discard as regular waste

Product name

WaterFilter⁺

Productcode

24.2.201

Packaging unit

24 pcs./box

Filterhead

Sold separately under productcode 24.2.901

Technology


Capillary microfiltration membranes
Granular activated carbon (GAC)

Conditions of use

Max. operating pressure	6 bar
Operating temperature	0 – 40 °C
Replace at least every	6 months (recommended)
	Flush 5 liters before first use

Performance¹

Rated capacity	3,800 L (1,000 G)
Rated service flow	3.8 Lpm (1 Gpm)
Recommended service life	6 months

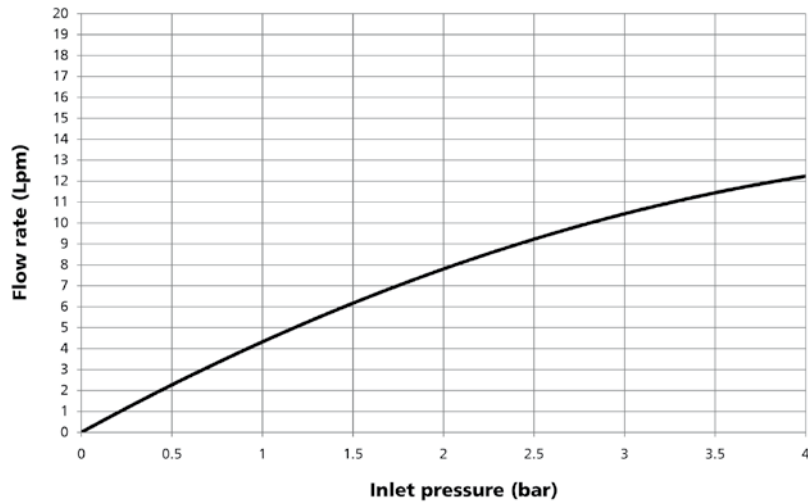

Graph: Typical water flow rate - pressure drop correlation for the WaterFilter⁺

Claims:

This system has been tested according to NSF/ANSI 42/53 for the reduction of the substances below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42/53.

Substance	Influent Challenge concentration	Reduction requirement	Overall reduction
Chlorine	2.0 mg/L ± 10%	≥ 50%	> 83%
Cyst	Minimum 50,000/L	99.95%	> 99.99%

Not Performance Tested or Certified by NSF:

Biological retention ²	Bacteria	> 99.9999% (Klebsiella T.)
Chemical reduction ³	Herbicides & pesticides	> 82% (Atrazine & 2.4 D)
	Medicine residues	> 94% (Ethinylestradiol)



¹ Product performance is dependent on incoming water conditions

² Tested by Vitens Laboratory, The Netherlands

³ Based on Manufacturer Internal testing at 2 Lpm for 3,800 L

While testing was under standard laboratory conditions, actual performance may vary

System tested and certified by NSF International against NSF/ANSI Standard 42 for the reduction of Chlorine Taste & Odor and Standard 53 for the reduction of cyst.

Disclaimer: The information and data in this document is for general purposes only. The information is believed to be correct, however any reliance you place on such information is strictly at your own risk. While we endeavor to keep the information accurate, we make no representations or warranties of any kind, express or implied, about the information, products, services, or related graphics on this Data Sheet for any purpose. Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the use of our products. Warranty information for the products can be found in our Terms and Conditions of sale. Property rights (industrial, intellectual, and other) must be observed.

Filtrix BV

Siliciumweg 28 • 3812 SX Amersfoort • Nederland

T +31 33 422 04 40 • F +31 33 422 04 41

E info@filtrix.com • I www.filtrix.com

Please visit our website to obtain information about your local support!



MEMBER

